
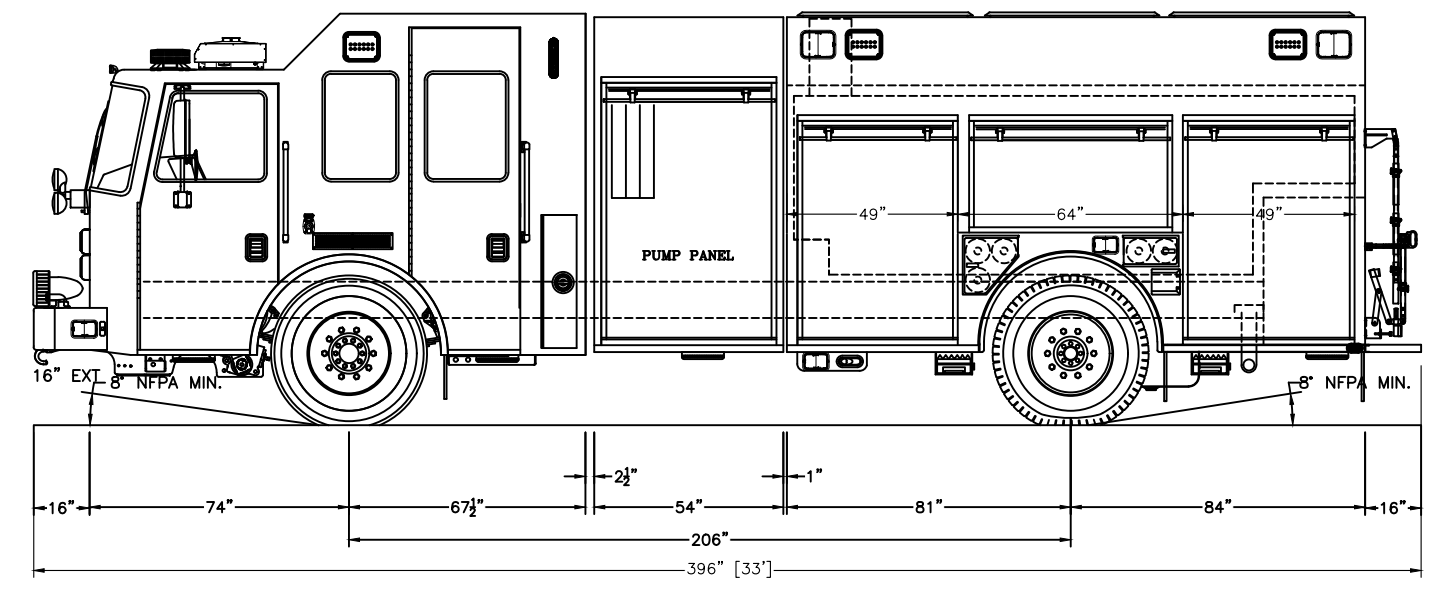
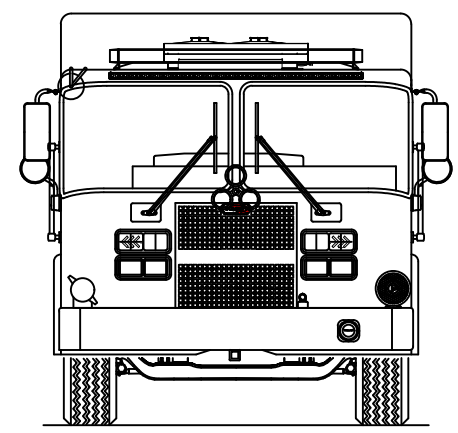
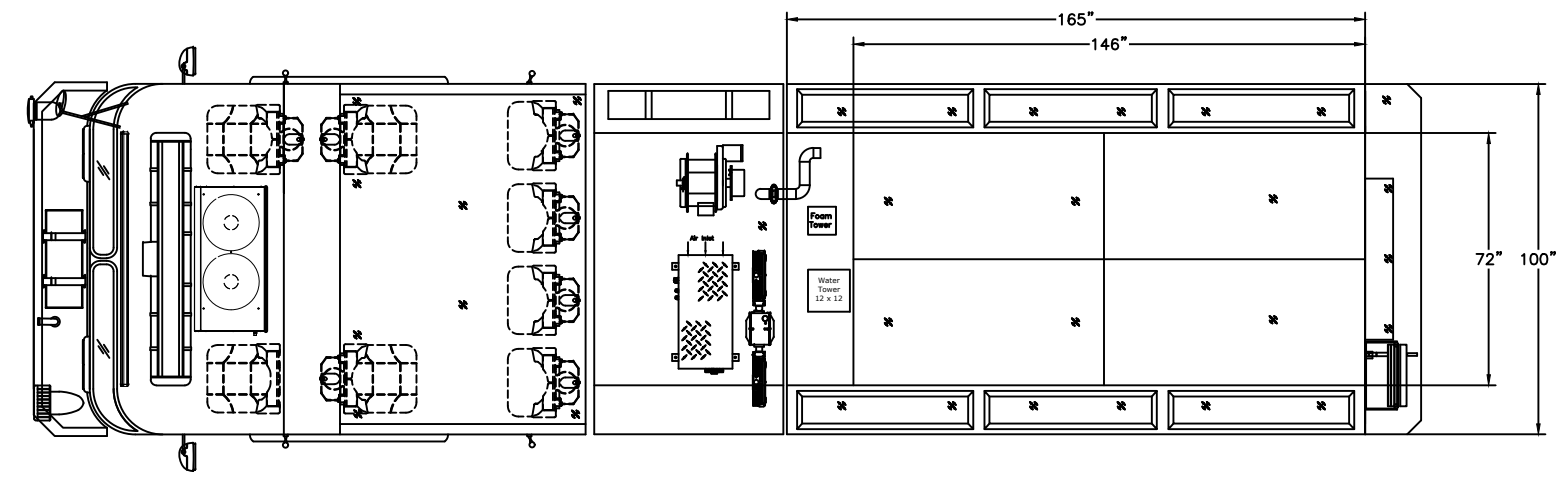
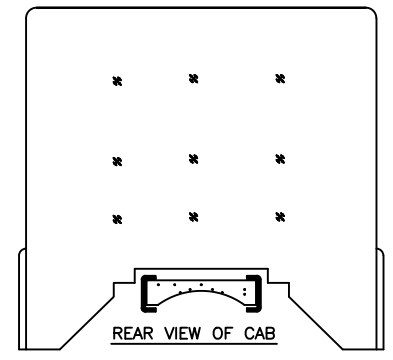
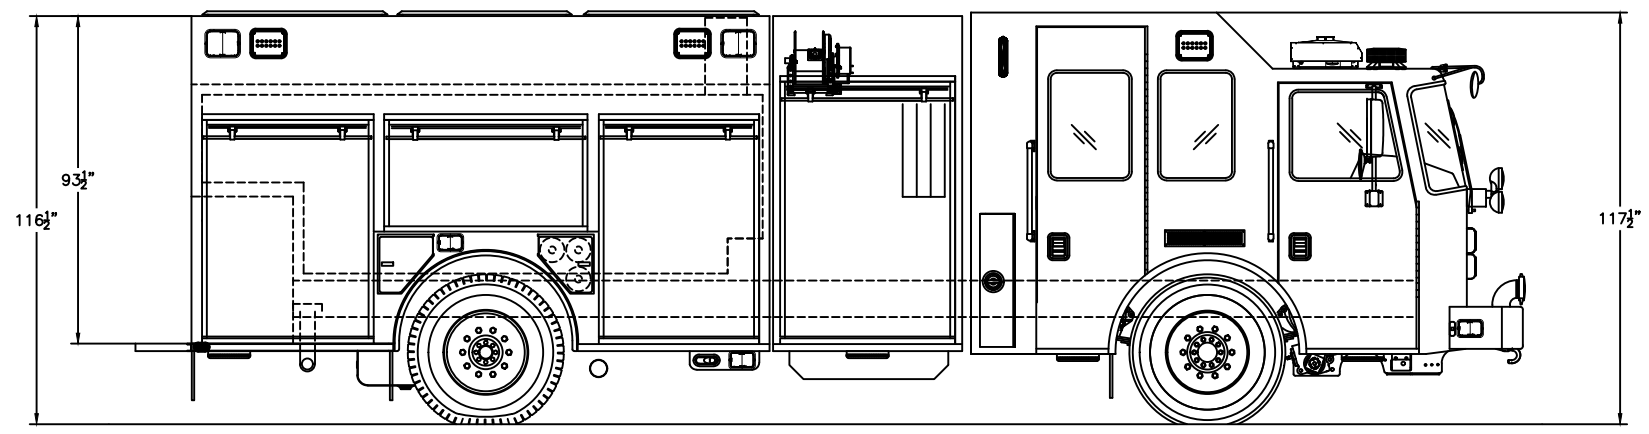


HOSE LOAD =
 200' OF 2 1/2"
 1,200' OF 5"
 300' OF 3"

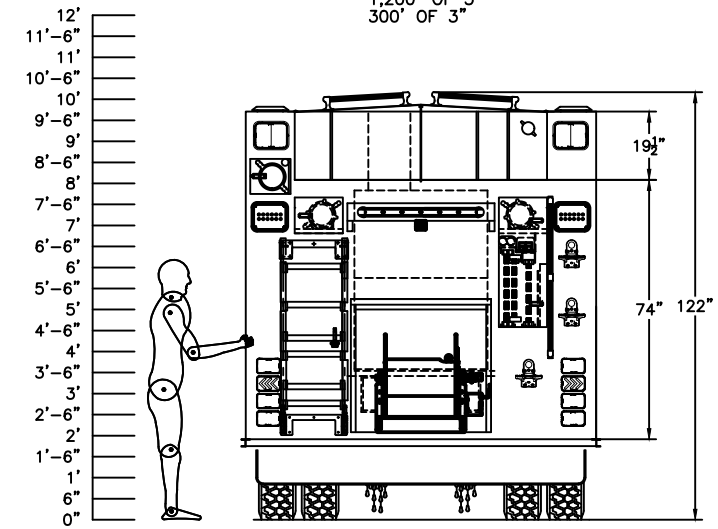

FOAM SYSTEM: FOAMPRO 1600

CAB: 100"W KME SEVERE SERVICE LFD 16" RR ALUM
 ENGINE & TRANS: CUMMINS L9 450 HP/ALLISON 3000 EVS
 AXLES: 22,000# STEERTEK FRONT/31,000# REAR
 PUMP: HALE QMAX-175 1750 GPM SINGLE STAGE
 WATER TANK: 1,000 GALLONS POLY W/25 FOAM
 BODY TYPE: 165" FLUSHBACK 12 GA 3CR12
 GENERATOR: HARRISON 8.0-MCR PTO/HYD STEALTH

THIS DRAWING IS A GENERAL CONFIGURATION AND MAY NOT NECESSARILY REFLECT ALL CONTRACTUAL REQUIREMENTS. CONTRACT SPECIFICATIONS SHALL PREVAIL OVER DRAWING.

CUSTOMER APPROVAL:

NAME: _____

TITLE: _____

DATE: _____

SYM	DATE	REVISION DESCRIPTION	APP'D

SALES ENGINEER : TBD

DIMENSIONS ARE APPROXIMATE & MAY VARY DUE TO BUILD ADJUSTMENTS

SCALE	DWG SIZE	DRAWN BY	DATE
NONE	B	JJM	23APR2021
APPROVED BY		TBA	

KME CUSTOM PUMPER
LANDISBURG FC, PA
QUOTE #6879-1

